


— est 1977 —

# SOTIRIS PETALAS

## JEWELS

### Handy tips to get an accurate ring size

- Finger size can fluctuate through the day. We recommend taking a few measurements during the day to find the most comfortable fit. If that is not possible then measure in the evening when your fingers would naturally be largest.
- It is important that you wait until your body temperature is just right, neither too hot, nor too cold. Cold fingers are smaller than hot fingers, so if you take a measurement when you are too cold or hot the reading will not be accurate.
- The thicker the ring, the tighter the fit, so if you choose a ring with a deep band width, you will likely need to go a size up.
- If you happen to have more prominent knuckles, it helps to measure the finger at the base of your finger (at the palm end) and the knuckle separately and choose a size that is somewhere in between the two.

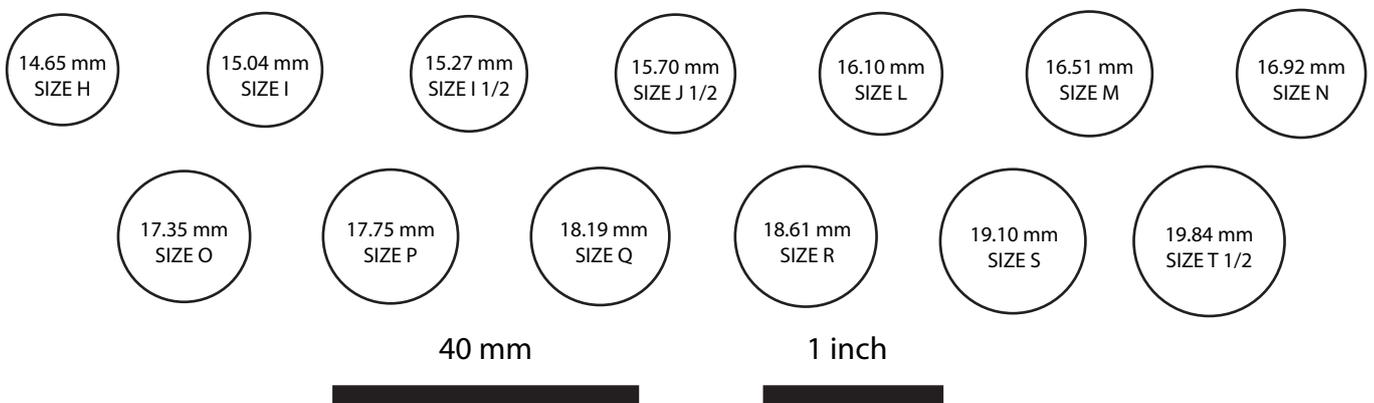

### USE A RING TO FIND YOUR RING SIZE

To find your ring size, please print the conversion chart page making sure the "Scale to fit" option is unchecked in the print dialogue box, and the print scale is 100%.

Use a ruler to check that the scale corresponds to the scale on the page.

## International Ring Size Conversion Chart

Inside Diameter		Inside Circumference		Sizes					
MM	Inches	MM	Inches	British & Australian	US & Canada	French & Russian	German	Japanese	Swiss
14.65	0.577	46.02	1.81	H	3 3/4	46 1/2	-	-	6 1/2
14.86	0.585	46.68	1.84	H 1/2	4	-	15	7	-
15.04	0.592	47.25	1.86	I	4 1/4	47 3/4	-	-	7 3/4
15.27	0.601	47.97	1.89	I 1/2	4 1/2	-	15 1/4	8	-
15.40	0.606	48.38	1.90	J	4 5/8	49	15 1/2	-	9
15.70	0.618	49.32	1.94	J 1/2	5	-	15 3/4	9	-
15.80	0.622	49.64	1.95	K	5 1/8	50	-	-	10
16.00	0.630	50.27	1.98	K 1/2	5 3/8	-	-	10	-
16.10	0.634	50.58	1.99	L	5 1/2	51 3/4	16	-	11 3/4
16.41	0.646	51.55	2.03	L 1/2	5 7/8	-	-	-	-
16.51	0.650	51.87	2.04	M	6	52 3/4	16 1/2	12	12 3/4
16.71	0.658	52.50	2.07	M 1/2	6 1/4	-	-	-	-
16.92	0.666	53.16	2.09	N	6 1/2	54	17	13	14
17.13	0.674	53.82	2.12	N 1/2	6 3/4	-	-	-	-
17.35	0.683	54.51	2.15	O	7	55 1/4	17 1/4	14	15 1/4
17.45	0.687	54.82	2.16	O 1/2	7 1/4	-	-	-	-
17.75	0.699	55.76	2.20	P	7 1/2	56 1/2	17 3/4	15	16 1/2
17.97	0.707	56.45	2.22	P 1/2	7 3/4	-	-	-	-
18.19	0.716	57.15	2.25	Q	8	57 3/4	18	16	17 3/4
18.35	0.722	57.65	2.27	Q 1/2	8 1/4	-	-	-	-
18.61	0.733	58.47	2.30	R	8 5/8	59	-	-	19
18.80	0.740	59.06	2.32	R 1/2	8 7/8	-	-	-	-
19.10	0.752	60.00	2.36	S	9 1/8	60 1/4	-	-	20 1/4
19.31	0.760	60.66	2.39	S 1/2	9 3/8	-	-	-	-
19.51	0.768	61.29	2.41	T	9 5/8	61 1/2	-	-	21 1/2
19.84	0.781	62.33	2.45	T 1/2	10	-	20	20	-
20.02	0.788	62.89	2.48	U	10 1/4	62 3/4	-	21	22 3/4
20.20	0.797	63.46	2.50	U 1/2	10 1/2	-	20 1/4	22	-
20.32	0.800	63.84	2.51	V	10 5/8	63	-	-	23 3/4
20.68	0.814	64.97	2.56	V 1/2	11	-	20 3/4	23	-
20.76	0.817	65.22	2.57	W	11 1/8	65	-	-	25
20.94	0.824	65.78	2.59	W 1/2	11 3/8	-	-	-	-
21.18	0.834	66.54	2.62	X	11 5/8	66 1/4	-	-	26 1/4
21.30	0.839	66.92	2.64	X 1/2	11 7/8	-	-	-	-
21.49	0.846	67.51	2.66	Y	12	67 1/2	21 1/4	25	27 1/2